


Skyline 3E

When you need access to great heights: Optimised transport dimensions, working heights of up to 16.35 m with convenient height adjustment.

Product description

- Two ropes so that centre and top sections can be adjusted separately.
- Rung-by-rung height adjustment in a grid of 280 mm.
- Wheel assemblies with abrasion-resistant surfaces that will not damage the wall.
- Locks securely thanks to automatic spring loaded pawls.
- The ladders with the Order Nos. 40448 and 40449 are equipped with 2 light alloy supports for easy erection and stabilisation. (Not to be used as free-standing ladders!)
- Improved plastic guide.
- Replaceable 2-component plastic end caps ensure secure positioning without the risk of slipping.
- Rungs and stiles made from extruded aluminium sections.

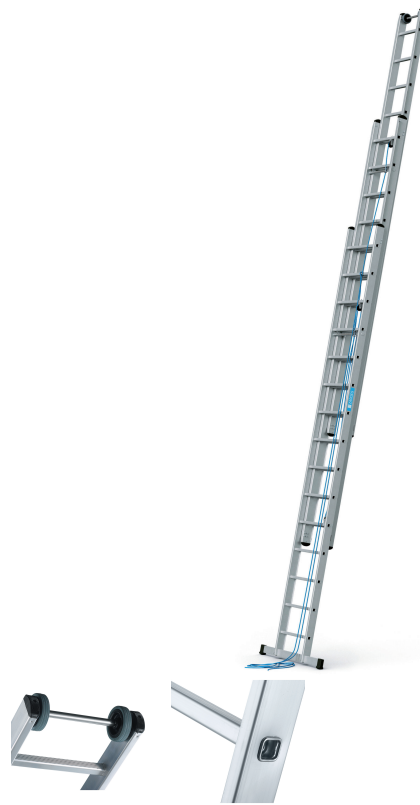

Hints and special features

Available up to working height 16.35 m!
Complies with EN 131 Professional.

Product features

Coating: natural
 Connection Stile-Rung: flanged
 Load: max. 150 kg
 Material: Aluminium
 Pitch rung/tread: 270 mm
 Producttype: Flanged rope-operated ladder with rungs, 3-section
 Stile depth: 98 mm
 Tread depth: 30 mm
 Type rung/tread: serrated
 Wheels: Rubber
 Wide crosspiece: 1.2 m

Product variants

Order number	External width of lower ladder	Number of rungs	Number of rungs	Overall length, extended	Overall length, retracted	Stile depth	Stile depth	Transport dimensions	Weight	Working height
40446	560 mm	15	3 × 15	10.55 m	4.4 m	86 mm	86mm / 98mm	4.420 mm × 565 mm × 228 mm	45 kg	11.15 m
40447	560 mm	18	3 × 18	12.55 m	5.25 m	86 mm	86mm / 98mm	5.260 mm × 565 mm × 228 mm	53 kg	13.1 m
40448	590 mm	20	3 × 20	14.2 m	5.8 m	98 mm	98mm /	5.820 mm ×	68 kg	14.7 m



Order number	External width of lower ladder	Number of rungs	Number of rungs	Overall length, extended	Overall length, retracted	Stile depth	Stile depth	Transport dimensions	Weight	Working height
							98mm	718 mm × 242 mm		
40449	590 mm	22	3 × 22	15.9 m	6.4 m	98 mm	98mm / 98mm	6.420 mm × 718 mm × 242 mm	74 kg	16.35 m